

Compressed Air Cooling Air AB Series

COPPER TUBE CONSTRUCTION

Performance Notes

- Compressed air and gas aftercoolers
- For water to air cooler
- All brass hubs and shell assemblies: reduce or eliminate galvanic and other types of corrosion
- Copper nickel tubes available for sea water service



Ratings

Maximum Operating Pressure - Tubes

250 PSI

Maximum Operating Pressure - Shell

250 PSI

Maximum Operating Temperature

350°F

Materials

Tubes Copper

Shell Brass

End Hubs Brass

End Bonnets Cast iron


Baffles Brass

Gaskets Nitrile rubber

Nameplate Aluminum foil

Mounting Brackets (optional) Steel


Unit Coding

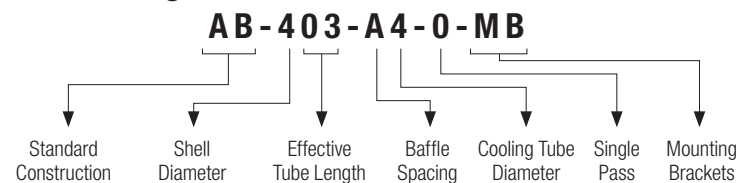

How to Order

AB	-		-		-	0	-			
Model Series AB		Model Size Selected 403 404 405 705 1006 1206 1207 1606 1607 1608		Baffle Spacing A - 1.125 B - 2.25 C - 4.5 D - 9.0		Tube Diameter Code 4 - 1/4" (400 & 700 models only) 6 - 3/8" (1000, 1200 & 1600 models only)		Tubeside Passes 0		MB or Blank

Dimensions

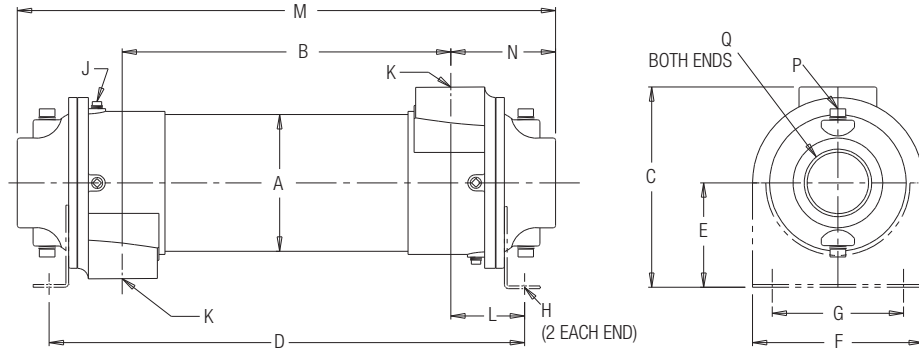

NOTE: Mounting brackets are optional.

Model	A Dia.	B	C	D*	E*	F*	G*	H*	J NPT	K NPT	L	M	N	P NPT	Q NPT	Weight (LBS)
AB-403-A4-0	2.12	25.62	3.50	29.06	1.94	2.62	1.76	.41 Dia.	—	.50	1.72	33.36	3.87	(4) .50	1.50	13
AB-404-A4-0	2.12	34.62	3.50	38.06	1.94	2.62	1.76	.41 Dia.	—	.50	1.72	42.36	3.87	(4) .50	1.50	16
AB-405-B4-0	2.12	43.62	3.50	47.06	1.94	2.62	1.76	.41 Dia.	—	.50	1.72	51.36	3.87	(4) .50	1.50	18
AB-705-B4-0	3.66	43.00	6.25	48.38	3.62	5.25	3.00	.44 x 100	(2) .38	1.00	2.69	50.40	3.70	(4) .50	2.50	40
AB-1006-B6-0	5.12	51.50	7.38	57.62	4.00	6.75	4.00	.44 x 100	(6) .38	1.50	3.06	59.60	4.05	(4) .50	3.00	80
AB-1206-C6-0	6.12	50.50	8.81	57.38	4.75	7.50	5.00	.44 x .88	(6) .38	2.00	3.44	60.25	4.88	(4) .50	3.00	130
AB-1207-C6-0	6.12	59.60	8.81	66.38	4.75	7.50	5.00	.44 x .88	(6) .38	2.00	3.44	69.25	4.88	(4) .50	3.00	150
AB-1606-C6-0	8.00	49.60	12.13	58.38	6.50	8.62	7.00	.44 x 100	(6) .38	3.00	4.39	62.62	6.52	(4) .50	5.00	259
AB-1607-D6-0	8.00	58.60	12.13	67.38	6.50	8.62	7.00	.44 x 100	(6) .38	3.00	4.39	71.62	6.52	(4) .50	5.00	270
AB-1608-D6-0	8.00	67.60	12.13	76.38	6.50	8.62	7.00	.44 x 100	(6) .38	3.00	4.39	80.62	6.52	(4) .50	5.00	315

NOTE: We reserve the right to make reasonable design changes without notice. All dimensions in inches.

Selection Example

Specified

Two stage compressor with a 340 SCFM air delivery at 100 PSIG and a 250°F discharge temperature. Maximum allowable pressure loss is 2 PSI. Water flow rate to be determined.

Solution

STEP 1 From the 2-stage compressor column select model **AB-1006-B6-0** with 440 SCFM capacity.

STEP 1 To determine ΔP : Read column to right of SCFM capacity selected.
 $\Delta P = 0.3$ PSI

STEP 1 Water flow rate required
340 SCFM x .03 = 10.2 GPM

Capacity Selection

Model	2-Stage Recip 250°F Inlet Air		Rotary Screw 200°F Inlet Air	
	SCFM Capacity* in Tubes	ΔP , PSI, at Rated Capacity	SCFM Capacity* in Tubes	ΔP , PSI, at Rated Capacity
AB-403-A4-0	40	0.1	58	0.1
AB-404-A4-0	80	0.3	110	0.6
AB-405-B4-0	150	1.2	205	2.0
AB-705-B4-0	310	1.0	439	1.6
AB-1006-B6-0	440	0.3	654	0.5
AB-1206-C6-0	640	0.3	955	0.6
AB-1207-C6-0	1250	1.1	1690	1.9
AB-1606-C6-0	1600	0.5	2280	0.9
AB-1607-D6-0	2100	1.0	3080	1.7
AB-1608-D6-0	2800	1.6	3170	2.0

*Based on ambient air at 60°F, 14.7 psia, and 50% relative humidity. Compressed air cooled to within 15°F of inlet water temperature. Water flow rate 3 GPM per 100 SCFM air flow. For single stage compressor type, 300°F inlet, use 2-stage SCFM capacities with a 15% reduction.

Piping Diagram

Thermal Transfer Aftercoolers can be mounted in either of the positions shown. Separators should be used as shown. Consult factory for separator recommendations.



HydroThrift Corporation
1301 Sanders Ave SW
Massillon, OH 44647 USA
sales@hydrothrift.com 330-837-5141

